


2/2 WAY DIRECT ACTING SOLENOID VALVE, G 1/4"


COMMON FEATURES

Media: water, oil, air
Media temperature: -10°C ÷ +130°C
Ambient temperature: -10°C ÷ +50°C
Body material: brass (CW617N EN 12165)
Operator material: stainless steel
Protection class: IP 65 (with connector and gasket)

TYPE: D249



DIMENSIONS & WEIGHTS		D249
G connection	[ISO 228]	1/4"
A	[mm]	38
B	[mm]	72.1
C	[mm]	13
D	[mm]	13.8
weight	[kg]	0.18

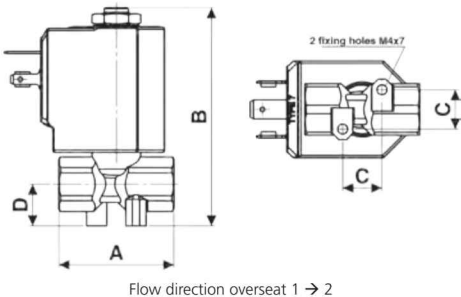

VALVE	nominal Ø	flow rate Kvs	OPD			COILS	
			min.	max. AC	max. DC	code	[Volts/Hz]
code	[mm]	[l/min]	[barg]	[barg]	[barg]	code	[Volts/Hz]
D249DVD	1.7	1.5	0	25	24	7250	24v DC
D249DVF	2.2	2.4	0	18	16	7200	24v 50/60Hz
D249DVH *	3.0	4.5	0	15	10	7400	110v 50Hz - 120v 60Hz
						7600	200v 50Hz - 220v 60Hz
						7700	230v 50Hz - 240v 60Hz

D249 - FKM seal, NC -

Seal material: FKM
Coil power: AC 18va (holding)
AC 36va (inrush)
DC 14w

OPTIONS

EPDM seal, temperature max. 120°C (e.g. code D249DEF)

* Minimum batch may be required

